

CPS 400-200 MP | Simple. Reliable. Easy to service.

The Chicago Pneumatic **CPS 400-200 MP** is a single-stage, oil-injected, rotary screw type air compressor, powered by a liquid-cooled, four-cylinder turbocharged Kohler diesel engine.

Benefits at a glance



Versatile

The Xc2003 controller with the Multiple Pressure regulated system allows for the pressure to be adjusted from 72 psi to 150 psi (with 2 psi increments), boosting utilization and ROI



Engineered efficiency

Comes with C106 compression element, efficient oil extraction, large-capacity oil cooling, and high-efficiency two-stage filters for top air quality



Fast maintenance

Large gull-wing doors provide easy component access for service, including a quick oil separator change in under 10 min

Technical data


Compressor

Normal effective working pressure	psi	100 150 200
Minimum working pressure	psi	72
Actual free air delivery	cfm	400 375 350
Compressor oil capacity	gal	6.3
Maximum ambient temperature (at sea level)	°F	122
Min. starting temperature, cold weather optional	°F	-13
Min. starting temperature standard	°F	14

Kohler KDI 3404TCR Tier 4 Final Engine

Engine speed (unloaded)	rpm	1500
Engine speed (maximum loaded)	gal	2200 2066 1936
Engine oil capacity	gal	5.4
Engine coolant capacity	gal	5.6
Fuel tank capacity	gal	52
DEF tank capacity	gal	4.5
Battery capacity (cold cranking amps)	A	1100

CPS 400-200 Features

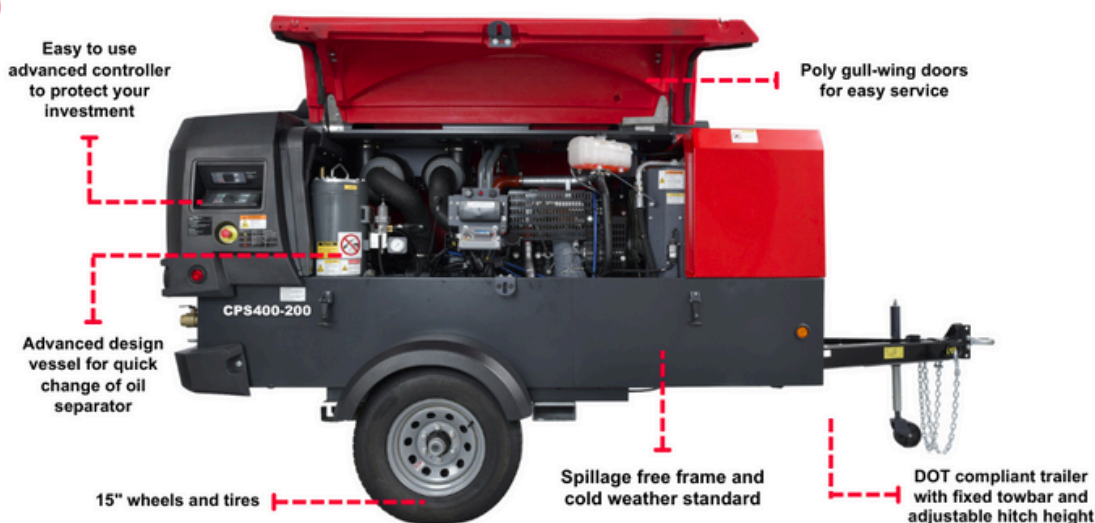

For more information, please contact your CP partner.

At Chicago Pneumatic, we have a passion for performance and long-lasting partnerships. Since 1901, we have been committed to reliability based on technology and trust.

www.cp.com